ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.

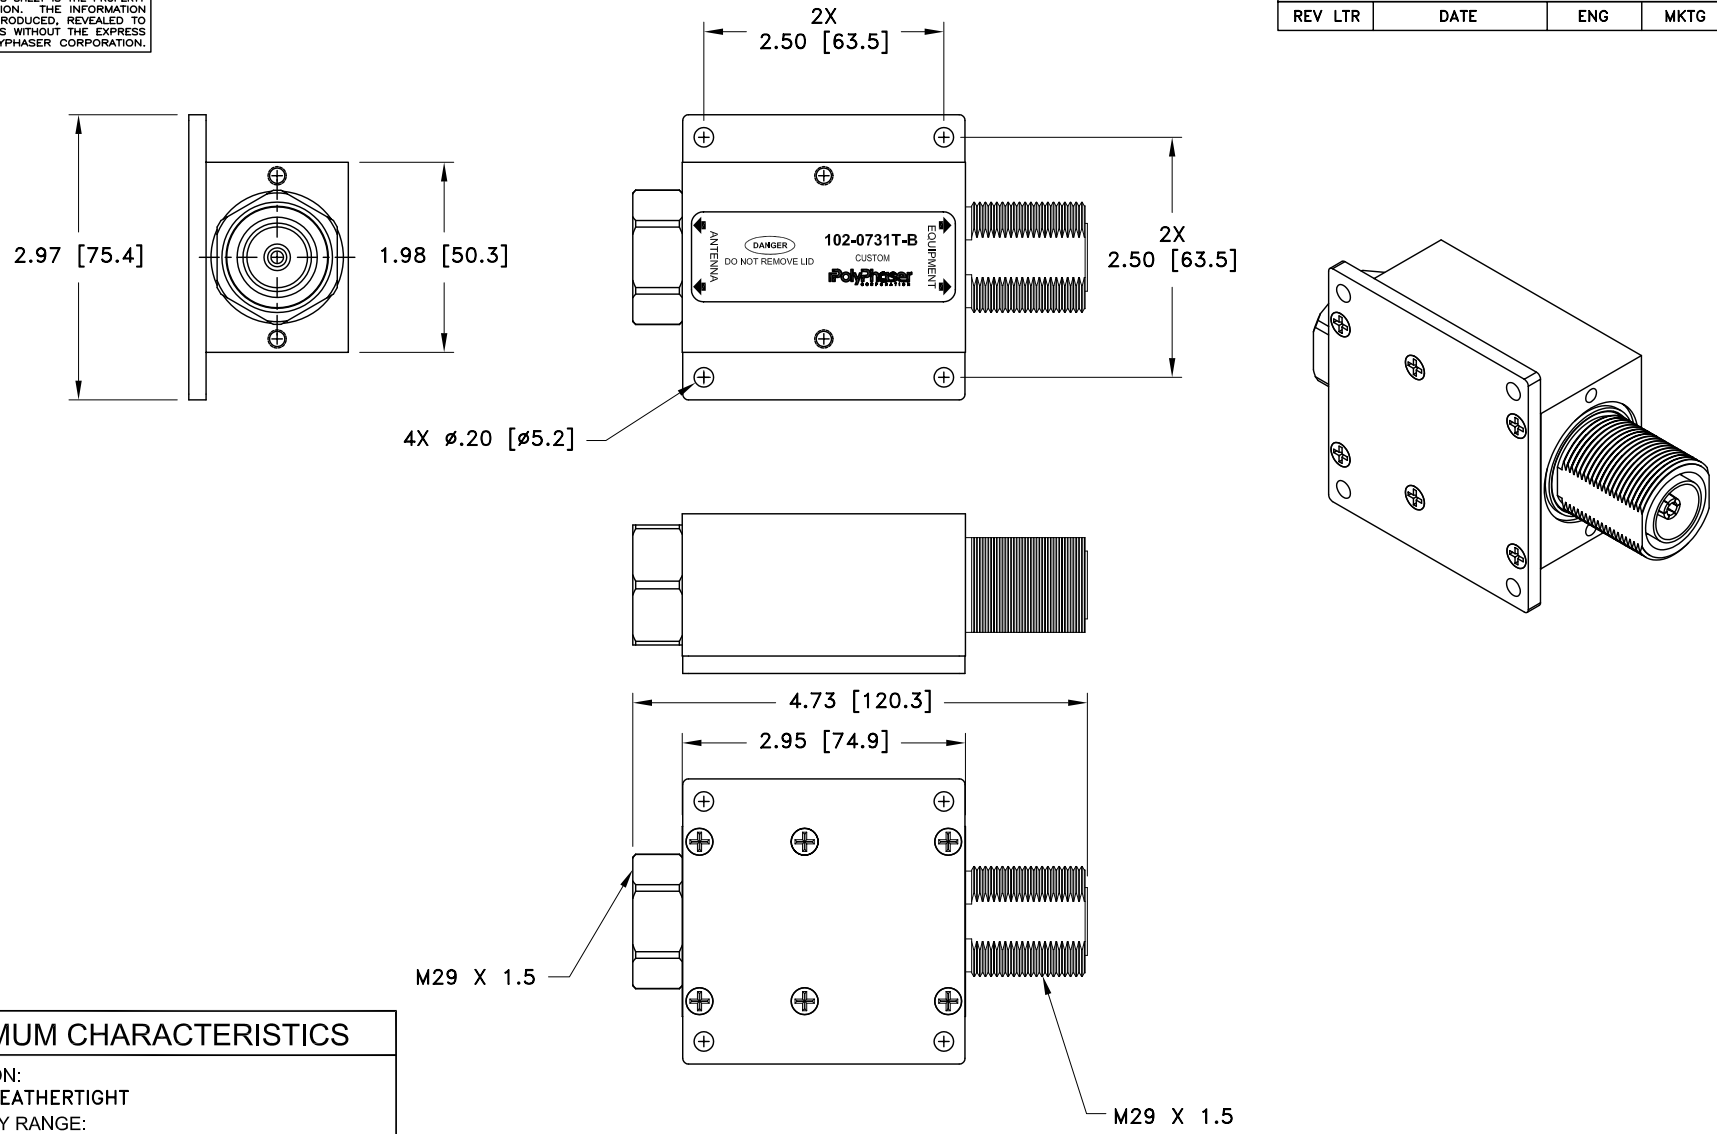

MAXIMUM CHARACTERISTICS

APPLICATION:
FLANGE/WEATHERTIGHT
FREQUENCY RANGE:
100MHz TO 512MHz
VSWR:
≤1.1:1 OVER FREQUENCY RANGE
INSERTION LOSS:
≤0.1dB OVER FREQUENCY RANGE
THROUGHPUT ENERGY:
≤50nJ FOR 3kA, 8/20µs WAVEFORM
SURGE:
20kA IEC 1000-4-5 8/20µs WAVEFORM
TEMPERATURE:
-25°C TO +85°C STORAGE/OPERATING +50°C

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER I. BENNETT	DATE 11/01/02	PolyPhaser®			
MECH ENGINEER R. DUNNING	DATE 11/13/02	P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476			
ELEC ENGINEER L. CHANG	DATE 11/12/02	DWG NO/PART NO/DESCRIPTION 102-0731T-B CUSTOMER PRINT			
MARKETING S. DOTTER	DATE 11/12/02				
QUALITY DEPT L. JACQUES	DATE 11/12/02	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1